IQ PANEL 5 QUICK GUIDE

Johnson Controls

1 WALL MOUNT



1. With a small phillips screwdriver, undo the locking screw from the back of the panel, remove the SmartMount backplate.



1. Mount the backplate to the wall using #6 flat head screws and appropriate wall anchors if needed, ensuring it is level.

2. A screw is required in break-away wall tamper for UL 2610.

3. Connect the power supply to the barrel jack on the back of the panel or to the (+) and (-) terminals on the backplate if using a custom length wire.



1. Latch the top of the IQ Panel 5 onto the SmartMount backplate

2. Swing the panel down towards the backplate and press firmly against the wall.

If using a custom length wire, power terminals will automatically connect and provide power to the IQ Panel.



1. With a small phillips screwdriver, screw in the locking screw from the bottom of the panel to secure it to the wall.

2

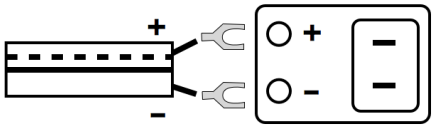

Connect power supply
WARNING! Use 12vDC Power Supply ONLY

3

Press and hold the power button on the right side of the panel for 3 seconds to power up

4

ALARM.COM

CREATE ACCOUNT

ALARM.COM MobileTech

TRY THE MOBILE TECH APP

5 ON SCREEN SETUP WIZARD (Auto Launch)

Once the panel powers up the on-screen wizard will automatically appear.

Follow the prompts to complete your installation.

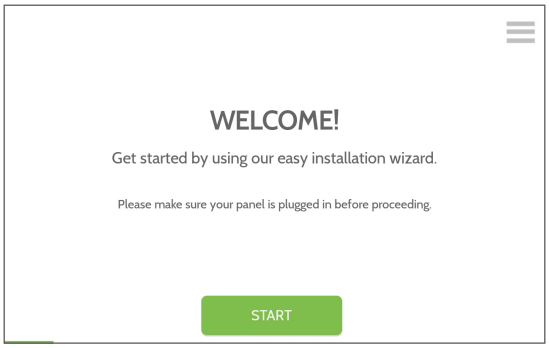

SETUP WIZARD (Manual Launch)



Tap to access settings tray

Settings

Advanced
(default installer password is 1111)

Setup Wizard
(Launch Wizard)

UL/ULC Residential Fire and Burglary and Commercial Burglary Alarm Control Panel
Certified under standards UL985, UL1023, UL2610, ULC-S545 & ULC-S304 Security Level I-II
Doc#: IQP5-QG Rev Date: 12/15/25
Qolsys, Inc. proprietary. Reproduction without written consent is not permitted.
EULA: https://www.johnsoncontrols.com/legal/digital/general-eula

GOT QUESTIONS?
CONTACT TECH SUPPORT
intrusion-support@jci.com

29011383R001