

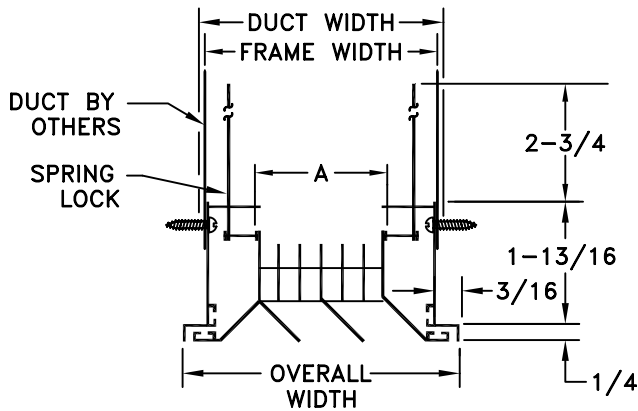
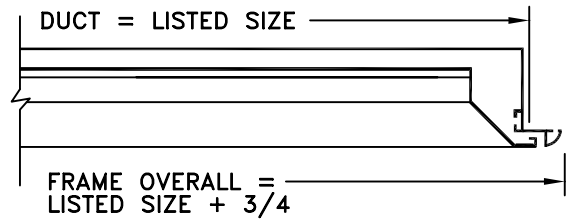


- AIR DIFFUSION VANES AT COUNTER FLOW ANGLES CREATE TURBULENT DISCHARGE FOR HIGH INDUCTION AND RAPID TEMPERATURE EQUALIZATION.
- INTEGRAL DIRECTIONAL DEFLECTORS FOR 1 OR 2-WAY HORIZONTAL PATTERNS.
- EXTRUDED ALUMINUM CONSTRUCTION.
- MAXIMUM ONE PIECE LENGTH = 72" LISTED SIZE.
- MULTIPLE SECTIONS KEYED WITH SPLICE PLATES FOR PROPER ALIGNMENT.
- AVAILABLE WITH 3 TO 15 ROWS IN 3 ROW INCREMENTS FOR LARGER CONFIGURATIONS CONTACT FACTORY.
- CORES EASILY REMOVED FROM PF OR PFS FRAMES, FRAME INSTALLATION/ALIGNMENT SPACERS PROVIDED.
- SATIN ANODIZED (SA) OR WHITE (W) FINISH.

**EH DIFFUSER WITH PF FRAME**

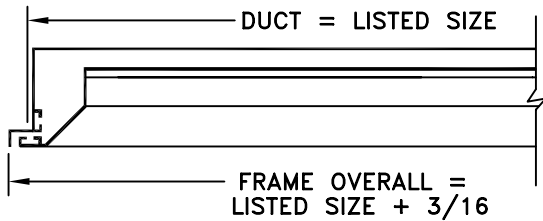


**EH DIFFUSER WITH PFS FRAME**

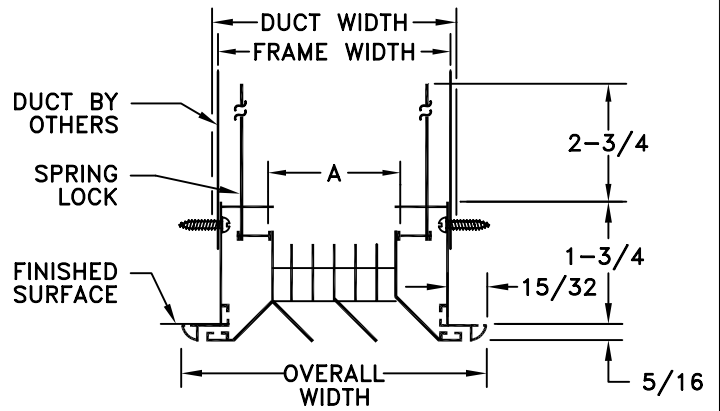

DIMENSION	NUMBER OF ROWS					DUCT WIDTH	FRAME WIDTH	OVERALL WIDTH	
	3	6	9	12	15			PF FRAME	PFS FRAME
A	1	1-13/16	2-11/16	3-7/16	4-1/4	A+1-3/4	A+1-5/8	A+2	A+2-9/16

**PATTERN DESIGNATIONS**



JOB NAME: _____	SUBMITTED BY: _____	DATE: 04-12-05	SD-1523
LOCATION: _____		<b>EH-STRIPLINE</b>	
ARCHITECT: _____		Extruded Aluminum	
ENGINEER: _____		Directional Linear Diffuser	
CONTRACTOR: _____			